



## Mosaic™ Franco-Belgian socket outlets

Cat. No(s): 0 771 10/11/13/14/19/45 - 0 792 71



0 771 11 - 0 792 71



0 771 19


### 1. USE

Socket outlets 16 A - 250 V and 3 A - 48 V to Franco-Belgian standard.

### 2. RANGE

	Designation	Cat. No.	Number of modules	Connection method	Weight (g)
	Socket 2P	0 771 10	2	automatic	26.00
	Franco-Belgian socket 2P+E	0 771 11	2	automatic	28.86
	Franco-Belgian socket 2P+E spécial 4 mm <sup>2</sup> and tapping	0 771 13	2	with screws	33.31
	Franco-Belgian socket 2P+E tamperproof	0 771 14	2	with screws	36.85
	Franco-Belgian socket 2P+E with flap cover	0 771 19	2	automatic	33.95
	Franco-Belgian socket 2P+E angled at 45°	0 771 45	2	automatic	31.90
	Franco-Belgian socket 2P+E aluminium	0 792 71	2	automatic	28.86


### 2. OVERALL DIMENSIONS

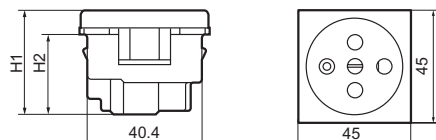

Cat. Nos.	H1 (mm)	H2 (mm)
0 771 10	37	28
0 771 11	37	28
0 771 13	37	28
0 771 14	37	28
0 771 19	40.5	28
0 771 45	38	29.5
0 792 71	37	28



4. PREPARATION

Modular mechanisms using adapter Cat. No. 0 802 99 (2 modules)  
 The mechanisms can be mounted on thin walls using adapters  
 Cat. No. 0 802 90 (1 module) Cat. No. 0 802 91 (2 modules)  
 Cat. No. 0 802 92 (2 x 1 module vertical)  
 The mechanisms can be flush-mounted or surface-mounted.

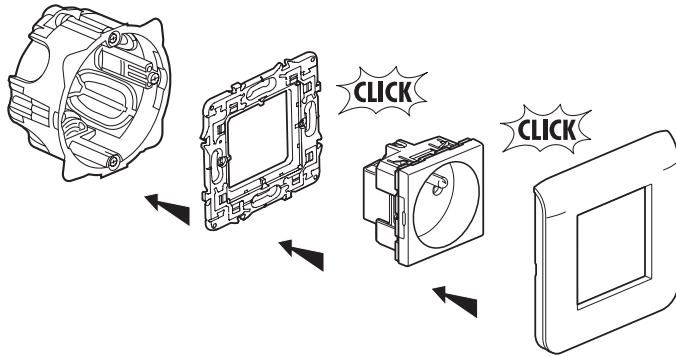

5. CONNECTION

	Terminal	Capacity	Stripping	Screwdriver
0 771 10 0 771 11 0 771 19 0 771 45 0 792 71	automatic	2 x 2.5 mm <sup>2</sup>	Stripping 13 mm	-
0 771 13 0 771 14	with screws	2 x 4 mm <sup>2</sup>	Stripping 10 mm	Flat 4 mm

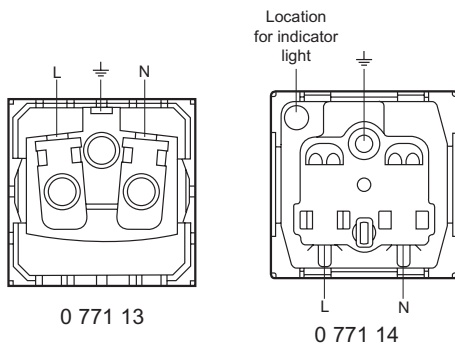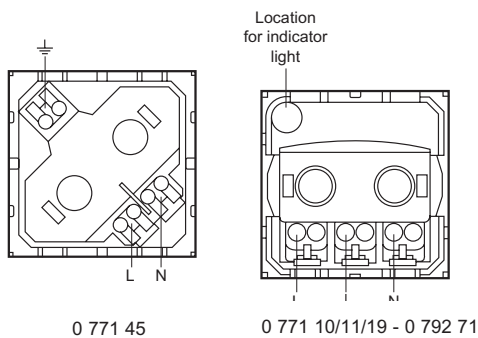

6. OPERATION

Cat. Nos 0 771 10/11/13/19/45 - 0 792 71  
 Standard operation by inserting or with drawal of a plug to normalized standard.  
 Cat. No. 0 771 14  
 Standard operation by insertion or with drawal of a 2P+E 0 502 99.

7. TECHNICAL CHARACTERISTICS

7.1 Mechanical characteristics  
 Impact tests: IK 04  
 IP 41 (C15100)

7.2 Material characteristics  
 Base: Polycarbonate  
 Cover plates: Polycarbonate  
 Cat. Nos 0 771 10/11/13/19/45: RAL 9003  
 Cat. No. 0 771 14: RAL 320

7.3 Electrical characteristics  
 Self-extinguishing: 650° C / 30 s  
 Voltage: 250 V~  
 Current: 16 A

7.4 Climatic characteristics  
 Storage temperatures: - 10° C to + 70° C  
 Operating temperatures: - 5° C to + 50° C

8. CLEANING

Surface cleaning with a cloth.  
 Do not use: acetone, tar remover, trichloroethylene.

8.1 Resistance to cleaning agents

Hexane (EN 60669-1), methylated spirits, soapy water, diluted ammonia, diluted pure bleach 10%, glass cleaning substance, pre-impregnated wipes.

8.2 Resistance to hospital-type cleaning agents

Resistance to the following agents: Anios, Surfanios, Bactylsine, Hydrogen peroxide (35%).

**Caution:** A preliminary test should be carried out if other specific cleaning products are to be used.

9. ACCESSORIES

Tamperproof insert for tamperproof socket outlets

Socket outlets	Tamperproof insert
0 771 14	0 502 99

10. CONFORMITY AND APPROVALS

Approvals in process:  
 Cat. Nos 0 771 10/11/14/19/45 - 0 792 71 NF - BBJ  
 Cat. No. 0 771 13 NF - BBJ - CEBEC - EZU  
 Stands up to 5000 movements