



Mosaic™ Mosaic Link 2P+E Flush sockets


Cat. No(s): 2 781 05L/64L/65L/72L/73L/76L/84L



2 781 05L



0 771 00L



2 781 84L

1. USE

Modular 2P+E Flush sockets that can be joined together, for installation in floor boxes, columns, mini-columns, desktop multi-outlet extensions, trunking and flush-mounting boxes with 50 mm recommended depth. Easy to clean and prevent the build up of dirt. Other Mosaic Link sockets can be added using connection accessory Cat. No 0 771 00L.

Usage restriction:

In plastic trunking, the mechanical strength of an assembly made up of Mosaic Link sockets is limited to 4 recesses maximum.

2. RANGE

Mosaic Link 2P+E Flush sockets - 2 modules - Sockets at 45° angle French standard

2 781 05L	White	2P+E Flush socket
2 781 76L	Red	Tamperproof 2P+E Flush socket


Mosaic Link 2 x 2P+E Flush sockets - 4 modules - Sockets at 45° angle French standard

2 781 64L	White	2 x 2P+E Flush socket
2 781 72L	Red	2 x 2P+E Flush socket
2 781 84L	Red	Tamperproof 2P+E Flush socket

Mosaic Link 3 x 2P+E Flush sockets - 6 modules - Sockets at 45° angle French standard

2 781 65L	White	3 x 2P+E Flush socket
2 781 73L	Red	3 x 2P+E socket

3. DIMENSIONS (mm)

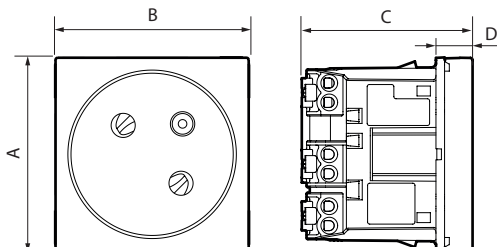

Cat. Nos	A	B	C	D
2 781 05L/76L	45	45	40	8.5
2 781 64L/72L/84L	45	90	40	8.5
2 781 65L/73L	45	135	40	8.5

4. CONNECTION

Type of terminals: automatic with side connections
 Number of terminals: 3 inputs - 3 outputs
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Protection against solid bodies and liquids: IP 40
 Impact tests: IK 07

■ 5.2 Material characteristics

Mechanism casing: PC
 Cover plates: RAL 9003 white ABS + PC
 Red, blue, grey, orange, green ABS + PC
 Connection accessory: Grey PP

Halogen-free
 UV-resistant

Self-extinguishing:

850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Current: 16 A
 Voltage: 250 V~

■ 5.4 Climatic characteristics

Storage temperature: - 10°C to + 70°C
 Usage temperature: - 5°C to + 35°C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

Resistance to cleaning products:

Hexane (NF C 61-314), methylated spirits, soapy water, diluted ammonia, pure bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using other special cleaning products.

7. ACCESSORIES

0 771 00L: Mosaic Link connection accessory used for quick and easy connection between 2 sockets or 2 socket blocks, either Mosaic Link or Soluclip for snap-on trunking.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
 See e.catalogue