


Céliane™
Roller blind touch-control switch

Cat. No(s): 670 45




670 45


1. USE

For controlling roller blinds with only the lightest stroke.
For controlling motors directly or via an automation control unit.


2. RANGE

	Description	Cat. No.	Weight (g)
	Timed roller blind touch-control switch	670 45	52.2

3. OVERALL DIMENSIONS

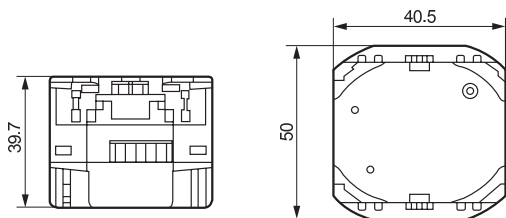

4. FITTING

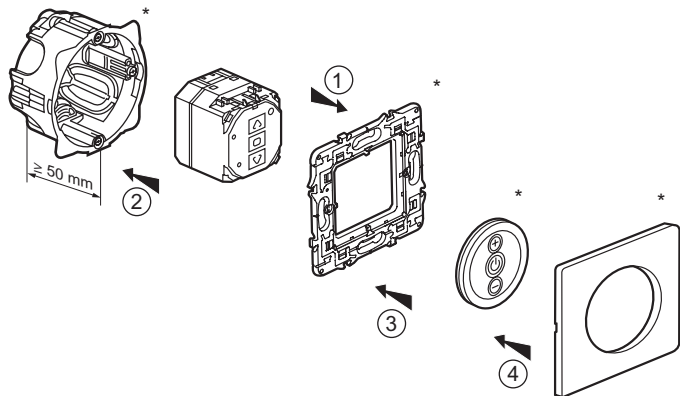


* not supplied with the mechanism

4. FITTING (cont'd)

- 1 - The mechanism is clipped to the support from the back.
 - 2 - The mechanism/support assembly is screwed to the flush-mounting box.
 - 3 - The rocker is clipped to the mechanism
 - 4 - The plate is clipped to the support
- Can be fitted with the full range of Céliane finishes.
Vertical or horizontal multi-gang mounting.

5. CONNECTION


Number of terminals: 4
Terminal type: with screws
Terminal capacity: 2 x 1.5 mm² or 1 x 2.5 mm²
Tool: flat screwdriver 3.5 mm
or Philips No. 1
or Posidriv No. 1
or mixed size 0
Stripping length: 8 mm

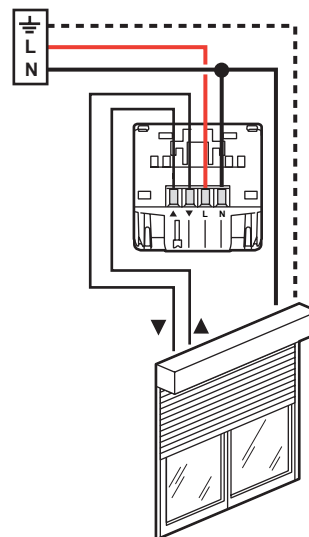

Roller blind touch-control switch

6. OPERATION

6.1 Description of the control buttons

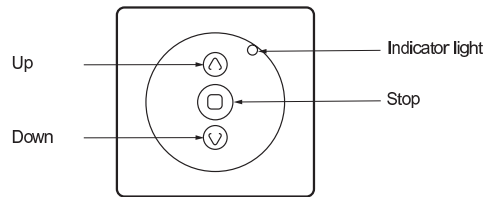

7. TECHNICAL DATA

7.1 Mechanical characteristics

Impact tests: IK 04

Penetration by solid/liquid bodies: IP 20

} no rocker

7.2 Material characteristics

Cover: Polycarbonate

Base: Polycarbonate

7.3 Electrical characteristics

Self-extinguishing: 650°C / 30 s

Voltage: 100 -240 V

Frequency: 50/60 Hz

Maximum motor power:

240 V	1 x 500 VA
100 V	1 x 270 VA

7.4 Climatic characteristics

Storage temperatures: -10°C to +70°C

Operating temperatures: -5°C to +35°C

8. CLEANING

No cleaning.